

Toggle menu  
Blue Gold Program Wiki

## Navigation

- [Main page](#)
- [Recent changes](#)
- [Random page](#)
- [Help about MediaWiki](#)

## Tools

- [What links here](#)
- [Related changes](#)
- [Special pages](#)
- [Permanent link](#)
- [Page information](#)

## Personal tools

- [Log in](#)

## personal-extra

Toggle search

Search

Random page

## Views

- [View](#)
- [View source](#)
- [History](#)
- [PDF Export](#)

## Actions

# Template:Navbox with collapsible groups/doc

From Blue Gold Program Wiki

< [Template:Navbox with collapsible groups](#)

The printable version is no longer supported and may have rendering errors. Please update your browser bookmarks and please use the default browser print function instead.

**This is a [documentation subpage](#) for [Template:Navbox with collapsible groups](#).**

[40px](#) It contains usage information, [categories](#) and other content that is not part of the original template page.

**This template is used on [approximately 113,000 pages](#).**

To avoid major disruption and server load, any changes should be tested in the template's [40px /sandbox](#) or [/testcases](#) subpages, or in your own [user subpage](#). The tested changes can be added to this page in a single edit. Consider discussing changes on the [talk page](#) before implementing them.

30px This template uses [Lua](#):  
• [Module:Navbox with collapsible groups](#)

```
Navbox  
suite  
• {{Navbox}}  
• {{Navbox  
with collapsible  
groups}}  
• {{Navbox  
with  
columns}}  
•  
{{Navboxes}}  
• v  
• t  
• e
```

This template produces a [navigation template](#) that has groups of relevant articles on a certain topic. All groups are hidden by default. However, with a parameter call, an individual group can be shown that has the other articles in the same group.

## Contents

- [1 Usage](#)
- [2 Parameters](#)
  - [2.1 Setup parameters](#)
  - [2.2 Basic data parameters](#)
  - [2.3 Group/list parameters](#)
  - [2.4 Style parameters](#)
  - [2.5 Microformat parameters](#)
- [3 Examples](#)
  - [3.1 Basic example](#)
  - [3.2 Nesting other Navbox forms](#)
  - [3.3 Nesting Navboxes to get more groups/lists](#)
- [4 See also](#)

## Usage

Please remove the parameters that are left blank. The template currently supports up to 20 groups/lists but more can be added if needed. You should use a minimum of two groups/lists; otherwise, use `{{Navbox}}` instead.

```

{{Navbox with collapsible groups
| name = {{subst:PAGENAME}}
| state = {{{state|}}}
| titlestyle =
| title =
| image =
| listclass = hlist
| selected = {{{selected|{{{1|}}}}}

| abbr1 =
| group1 =
| list1 =

| abbr2 =
| group2 =
| list2 =

<!--[etc, to:]-->

| abbr20 =
| group20 =
| list20 =
}}
```

## Parameters

This template shares many common parameters with its sister templates {{Navbox}} and {{Navbox with columns}}. The common parameters are marked with a cross<sup>†</sup>. Please refer to the documentation of {{Navbox}} for more in depth descriptions and examples of those parameters.

### Setup parameters

*name*<sup>†</sup>

The name of the template. The name of this template, for example, is "Navbox with collapsible groups".

*state*<sup>†</sup> [uncollapsed, collapsed, plain, off]

The initial state of the show/hide feature for the main title. See {{Navbox}} for more information. Does not affect display or hiding of group items, see *state<sub>n</sub>* below.

*navbar*<sup>†</sup>

Possible values are plain, off, and the default value of blank. See {{Navbox}} for more information.

*border*<sup>†</sup>

Possible values are `child`, `none`, and the default value of `blank`. Set to `child` if you wish to use the navbox inside of another navbox; with this option, the child navbox is borderless and fits snugly inside of its parent navbox. The parent navbox may be the list area of `{{Navbox}}`, the columns of a `{{Navbox with columns}}`, or a list area of `{{Navbox with collapsible groups}}`. See `{{Navbox}}` for more information and examples.

## Basic data parameters

*title*<sup>†</sup>

The title of the template, displayed centered in the titlebar at the top of the template.

*above*<sup>†</sup>

Text or other elements to appear above groups/lists.

*image*<sup>†</sup>

Image to the right of all of the groups/lists.

*imageleft*<sup>†</sup>

Image to the left of all of the groups/lists.

*below*<sup>†</sup>

Text or other elements to appear below the groups/lists.

## Group/list parameters

*group<sub>n</sub>*<sup>†</sup>

The title of each section.

*list<sub>n</sub>*<sup>†</sup>

The content/wikilinks that will be shown in the group. ~~Use dots or bullets as separators~~ (see the [See also](#) section). A `{{Navbox}}` or `{{Navbox with columns}}` can optionally be used here with its `border = child` parameter set. If this is done, leave the corresponding group<sub>n</sub> blank, as the child navbox will already provide the collapsible feature.

*abbr<sub>n</sub>*

This is the abbreviation of the group. See [selected](#) parameter immediately below to see how to use this parameter. This parameter is optional, but recommended.

*selected*

If the value of `selected` equals the value of `abbrn`, then `listn` is uncollapsed and all other lists are collapsed. If `selected` is left blank, or if it does not match any `abbrn`, then all groups are collapsed. Usually this parameter should be set to `{{1}}`. Since this template is a base template for others, there has to be a way to pass the group parameter from the article, to the secondary template to this one.

The collapsed/uncollapsed options can be listed on the template's page by using the `{{Collapsible sections option}}` template in the `<noinclude>` part of the page.

*state<sub>n</sub>* [uncollapsed, collapsed, plain, off]

The initial collapsible state of `listn`. Set to collapsed by default. Overridden to uncollapsed if `selected` equals `abbrn`.

*image<sub>n</sub>*

An image to appear in the `listn` content area on the right side.

*imageleft<sub>n</sub>*

An image to appear in the `listn` content area on the left side.

## Style parameters

*bodystyle*<sup>†</sup>

CSS style/s to apply to the entire template

*titlestyle*<sup>†</sup>

[CSS](#) style/s to apply to titlebar; usually `background:color`. The color of wikilink text must be manually changed using span tags. For example use `title = [[Scouting|<span style="color:ivory;">Scouting</span>]]` to change the color of the link to ivory. The [show]/[hide] button and the vde link button use the color set in the *titlestyle* parameter. Here is an example of setting the *titlestyle*:

```
titlestyle = background:darkgreen;color:ivory;
```

*abovestyle*<sup>†</sup>

*belowstyle*<sup>†</sup>

CSS style/s to apply to the *above* and *below* parameters, respectively.

*basestyle*<sup>†</sup>

CSS style/s to apply to the *title*, *above*, *below*, and *group<sub>n</sub>* parameters, all at the same time.

*imagestyle*<sup>†</sup>

CSS style/s to apply to the *image* parameter. Does not get applied to the *image<sub>n</sub>* parameters.

*imageleftstyle*<sup>†</sup>

CSS style/s to apply to the *imageleft* parameter. Does not get applied to the *imageleft<sub>n</sub>* parameters.

*groupstyle*<sup>†</sup>

CSS style/s to apply to all group heading parameters. Visit [this website](#) to get a lighter color similar to the title background color. Example:

```
groupstyle = background:lightgreen;
```

*group<sub>n</sub>style*<sup>†</sup>

CSS style/s to apply to a specific group heading; overrides any CSS styles set in *groupstyle*.

*liststyle*<sup>†</sup>

CSS style/s to apply to all list content parameters.

*list<sub>n</sub>style*<sup>†</sup>

CSS style/s to apply to specific list content parameters; overrides any CSS styles set in *liststyle*.

*listpadding*<sup>†</sup>

Padding to have in each list cell; defaults to 0.25em on the left/right and 0em on the top/bottom.

## Microformat parameters

*bodyclass*<sup>†</sup>

This parameter is inserted into the "class" attribute for the infobox as a whole.

*titleclass*<sup>†</sup>


This parameter is inserted into the "class" attribute for the infobox's title caption.

See [Wikipedia:WikiProject Microformats](#) for more information on adding microformat information to Wikipedia, and [microformat](#) for more information on microformats in general.

# Examples

## Basic example

```
<source lang="moin" style="overflow:scroll;">
```

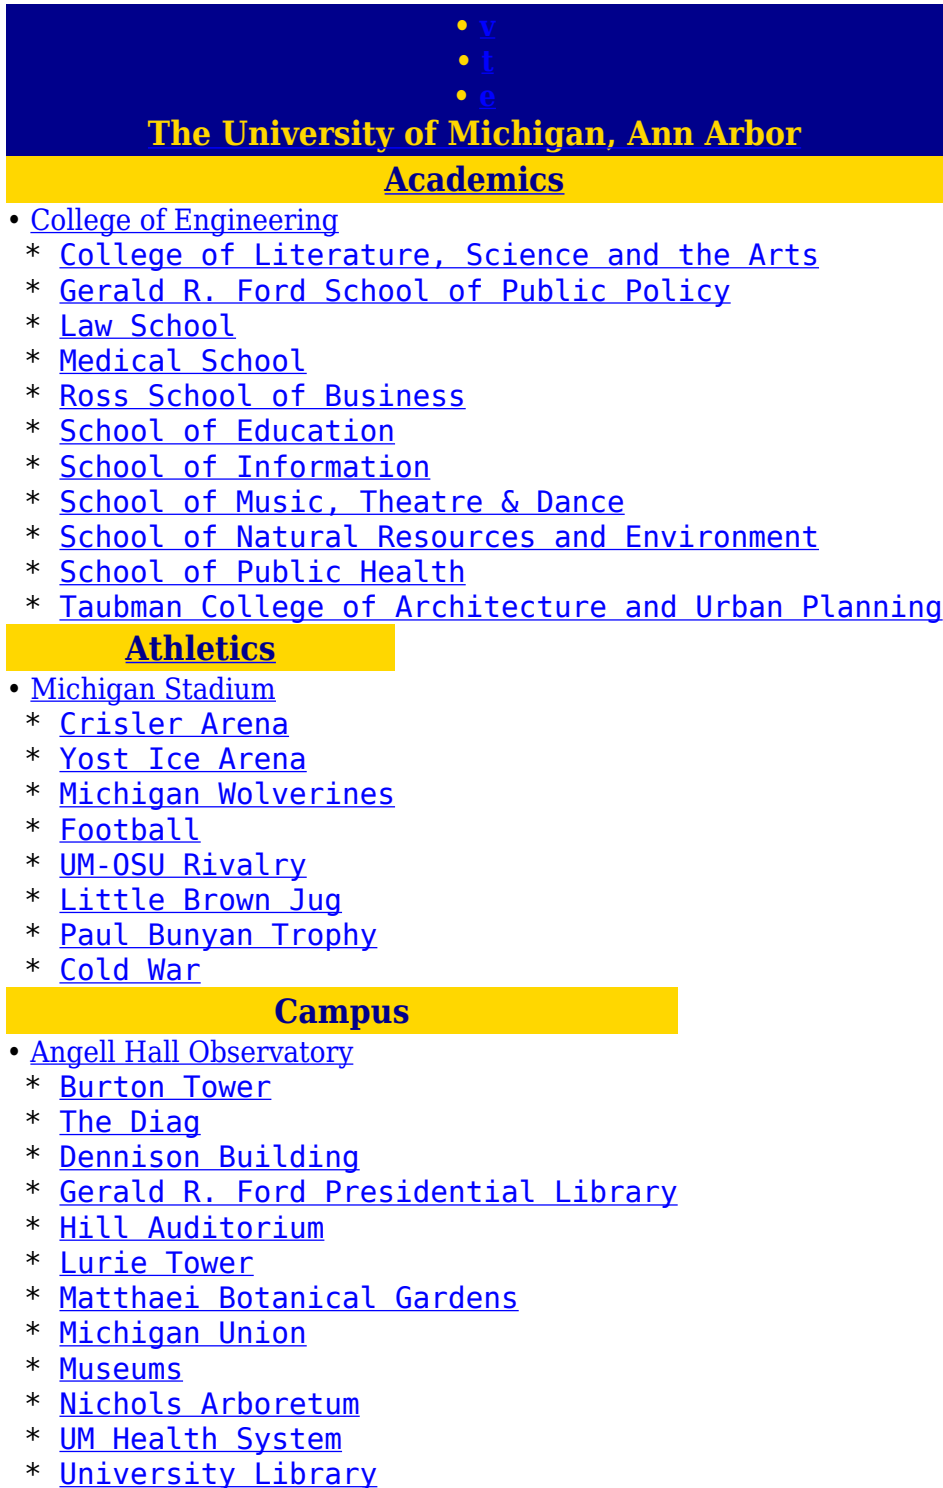

The image shows a screenshot of a web page for The University of Michigan, Ann Arbor. The page has a dark blue header with the university name and a yellow bar below it with the word 'Academics'. Below this is a list of academic departments. Another yellow bar contains the word 'Athletics', followed by a list of athletic facilities and events. A third yellow bar contains the word 'Campus', followed by a list of campus buildings and landmarks. The text is rendered in a monospaced font, and the page is styled with a scrollable area.

- [v](#)
- [t](#)
- [e](#)

**The University of Michigan, Ann Arbor**

**Academics**

- [College of Engineering](#)
- \* [College of Literature, Science and the Arts](#)
- \* [Gerald R. Ford School of Public Policy](#)
- \* [Law School](#)
- \* [Medical School](#)
- \* [Ross School of Business](#)
- \* [School of Education](#)
- \* [School of Information](#)
- \* [School of Music, Theatre & Dance](#)
- \* [School of Natural Resources and Environment](#)
- \* [School of Public Health](#)
- \* [Taubman College of Architecture and Urban Planning](#)

**Athletics**

- [Michigan Stadium](#)
- \* [Crisler Arena](#)
- \* [Yost Ice Arena](#)
- \* [Michigan Wolverines](#)
- \* [Football](#)
- \* [UM-OSU Rivalry](#)
- \* [Little Brown Jug](#)
- \* [Paul Bunyan Trophy](#)
- \* [Cold War](#)

**Campus**

- [Angell Hall Observatory](#)
- \* [Burton Tower](#)
- \* [The Diag](#)
- \* [Dennison Building](#)
- \* [Gerald R. Ford Presidential Library](#)
- \* [Hill Auditorium](#)
- \* [Lurie Tower](#)
- \* [Matthaei Botanical Gardens](#)
- \* [Michigan Union](#)
- \* [Museums](#)
- \* [Nichols Arboretum](#)
- \* [UM Health System](#)
- \* [University Library](#)

```
</source>
```



- [v](#)
- [t](#)
- [e](#)

## The University of Michigan, Ann Arbor

### Academics

- [College of Engineering](#)
- [College of Literature, Science and the Arts](#)
- [Gerald R. Ford School of Public Policy](#)
- [Law School](#)
- [Medical School](#)
- [Ross School of Business](#)
- [School of Education](#)
- [School of Information](#)
- [School of Music, Theatre & Dance](#)
- [School of Natural Resources and Environment](#)
- [School of Public Health](#)
- [Taubman College of Architecture and Urban Planning](#)

### Athletics

- [Michigan Stadium](#)
- [Crisler Arena](#)
- [Yost Ice Arena](#)
- [Michigan Wolverines](#)
- [Football](#)
- [UM-OSU Rivalry](#)
- [Little Brown Jug](#)
- [Paul Bunyan Trophy](#)
- [Cold War](#)

### Campus

- [Angell Hall Observatory](#)
- [Burton Tower](#)
- [The Diag](#)
- [Dennison Building](#)
- [Gerald R. Ford Presidential Library](#)
- [Hill Auditorium](#)
- [Lurie Tower](#)
- [Matthaei Botanical Gardens](#)
- [Michigan Union](#)
- [Museums](#)
- [Nichols Arboretum](#)
- [UM Health System](#)
- [University Library](#)

## Nesting other Navbox forms

This example shows `{{Navbox}}`, `{{Navbox with collapsible groups}}` and `{{Navbox with columns}}` all working together. Press the edit button for the section to view the code. Note that each of the child navboxes has the first parameter set to `child`



## Nesting Navboxes to get more groups/lists

You can conveniently nest Navboxes, including `{{Navbox with collapsible groups}}`, to get an unlimited number of groups/lists. The following example uses one instance of `{{Navbox with collapsible groups}}` to get the first 10 collapsible groups, a nested instance to get the next 10, and another nested instance to get the last 6. See the code to learn how it works. It is fairly simple to extend this to as many groups/lists as you like:

- **v**
- **t**
- **e**

**Title**

**A**  
List A

**B**  
List B

**C**  
List C

**D**  
List D

**E**  
List E

**F**  
List F

**G**  
List G

**H**  
List H

**I**  
List I

## **J**

List J

## **K**

List K

## **L**

List L

## **M**

List M

## **N**

List N

## **O**

List O

## **P**

List P

## **Q**

List Q

## **R**

List R

## **S**

List S

## **T**

List T

## **U**

List U

## **V**

List V

## **W**

List W

## **X**

List X

## **Y**

List Y

## **Z**

List Z

## **See also**

- [{{Collapsible sections option}}](#)
- [{{Nowrap begin}}](#) — Provides an explanation of the preferred method of using bullets or pipes to delimit list items. ~~Deprecated; use the `hlist` class.~~

Navigation templates comparison

S  
t  
y  
l  
e  
•  
v  
i  
e  
w  
•  
C  
i  
e  
w  
•  
P  
e  
r  
f  
o  
r  
m  
a  
n  
c  
e  
•  
P  
r  
o  
f  
e  
s  
s  
i  
o  
n  
a  
l  
•  
T  
a  
l  
k  
•  
M  
e  
d  
i  
t  
e  
r  
/  
s

• Systemic Lupus Erythematosus (SLE) is a chronic autoimmune disease that can affect any part of the body, including the skin, joints, kidneys, heart, lungs, blood vessels, and brain. It is characterized by periods of disease activity (flares) and periods of relative remission. The exact cause of SLE is unknown, but it is thought to be a combination of genetic and environmental factors. Symptoms can vary widely and may include fatigue, joint pain, skin rashes, and organ damage. Treatment typically involves a combination of medications, including anti-inflammatory drugs, immunosuppressants, and corticosteroids. Regular medical supervision and monitoring are essential for managing the disease and preventing complications.

L  
r  
e  
r  
r  
t  
t  
r  
a  
v  
y  
b  
o  
x  
w  
e  
i  
h  
c  
o  
a  
p  
s  
o  
l  
e  
r  
g  
o  
u  
p  
s  
s  
t

• C h e n t s i s a v b o x v o c c e n e u m p o s s i b i l e c e n e c c e e b b i c

## Collapsible attributes

C  
u  
s  
e  
s  
e  
r  
n  
a  
m  
e  
s  
p  
a  
c  
e  
s  
a  
n  
d  
p  
r  
o  
p  
e  
r  
t  
y  
n  
a  
m  
e  
s  
a  
r  
e  
l  
i  
s  
t  
e  
d  
b  
e  
l  
o  
w  
.

Retrieved from

["https://www.bluegoldwiki.com/index.php?title=Template:Navbar\\_with\\_collapsible\\_groups/doc&oldid=2140"](https://www.bluegoldwiki.com/index.php?title=Template:Navbar_with_collapsible_groups/doc&oldid=2140)

### Namespaces

- [Template](#)
- [Discussion](#)



## Variants

### [Categories:](#)

- [Pages with broken file links](#)
- [Template documentation pages](#)

This page was last edited on 24 February 2020, at 06:50.

## Blue Gold Program Wiki

The wiki version of the Lessons Learnt Report of the Blue Gold program, documents the experiences of a technical assistance (TA) team working in a development project implemented by the Bangladesh Water Development Board (BWDB) and the Department of Agricultural Extension (DAE) over an eight+ year period from March 2013 to December 2021. The wiki lessons learnt report (LLR) is intended to complement the BWDB and DAE project completion reports (PCRs), with the aim of recording lessons learnt for use in the design and implementation of future interventions in the coastal zone.

- [Privacy policy](#)
- [About Blue Gold Program Wiki](#)
- [Disclaimers](#)

Developed and maintained by Big Blue Communications for Blue Gold Program



[Blue Gold Program Wiki](#)